


Μονοπόμπες MOHNO PUMPS

Manufacturer: Enoveneta

Introduction

Mohno pumps are available in hopper or transfer version. This type of pump is extremely versatile and allows to work with diverse types of products such as: whole, de-stemmed, crushed, fermented grapes, as well as worst. These pumps can also be used to transfer highly viscous products. Product pumping takes place without pulsations and the very high operating pressure, allows high prevalence applications.

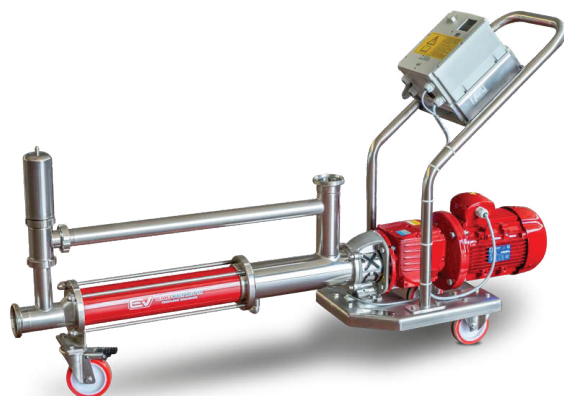

MOHNO PUMP T MODEL



MOHNO PUMP T MODEL HOPPER



ΜΟΗΝΟ PUMP T MODEL WITH HOPPER

Standard features


- AISI 304 stainless steel stand
- AISI 304 stainless steel pump body
- Food safe stator
- AISI 304 stainless steel feeding hopper with auger
- Level probe for automatic start and stop of the pump
- 400/3/50 control panel with reverse feature

Optionals

- Electronic speed variator
- Enzymes dosing pump
- Safety pressure switch

Μονοπόμπα T ΜΟΗΝΟ PUMP T MODEL

Manufacturer: Enoveneta

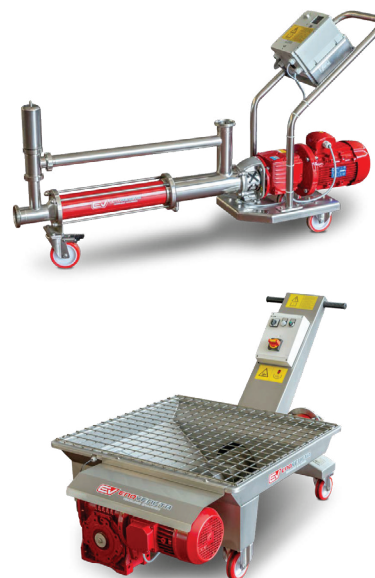

Technical data

		T 608	T 609	T 610	T 612	T 613	T 614
Motor power	kW	3.0	5.5	7.5	9.2	15.0	22.0
Hourly output	Ton/h	10/12	20/25	30/40	45/55	80/9	100/120
Revs per minute	rpm	200	200	200	200	200	150
Fittings	mm	100	100	120	120	125	150
Hopper length	mm	780	930	920	1080	1100	1500
Hopper depth	mm	900	980	1100	1200	870	1050
Hopper height	mm	450	480	480	570	1200	800
Length	mm	1600	1900	2100	2200	3250	3700
Depth	mm	900	980	1100	1200	870	1050
Height	mm	950	960	960	1000	1200	1500
Weight	Kg	150	200	270	400	600	800
Measurements and operating data are not legally binding and subject to change without notice.							

ΜΟΗΝΟ PUMP I MODEL FOR LIQUID TRANSFERS

Standard features


- AISI 304 stainless steel stand
- AISI 304 stainless steel pump body
- Food safe stator
- Mechanical sealing
- Liquid detection probe
- By-pass
- Electric panel 400/3/50 control panel complete with electronic speed variator, cable remote control and reverse feature

Optionals

- Litres counter
- Remote radio control
- Enzymes dosing pump
- Safety pressure switch

Μονοπόμπα I ΜΟΗΝΟ PUMP I MODEL

Manufacturer: Enoveneta

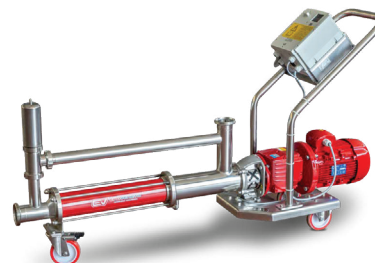

Technical data

		I 714	I 715	I 716	I 717	I 718	I 719	I 720	I 721	I 722
Motor power	kW	1.1	2.2	3.0	4.0	5.5	7.5	7.5	11.0	15.0
Flow rate	l/h	5.4/30	15/60	30/110	50/200	80/300	120/400	180/520	200/600	300/800
Revs per minute	rpm	180/1000	110/440	120/440	125/500	120/440	120/430	120/340	100/280	100/260
Fittings	DIN	40	50	65	65	80	100	100	125	125
Length	mm	1450	1600	1850	1950	2100	2300	2400	2500	2600
Depth	mm	300	450	500	500	600	600	600	600	600
Height	mm	800	1000	1000	1000	1000	1200	1200	1200	1200
Weight	Kg	50	80	90	110	150	255	280	300	320

Measurements and operating data are not legally binding and subject to change without notice.