


Σωλήνες Armorvin HNA VACUPRESS ARMORVIN HNA Manufacturer: Continental/Merlett

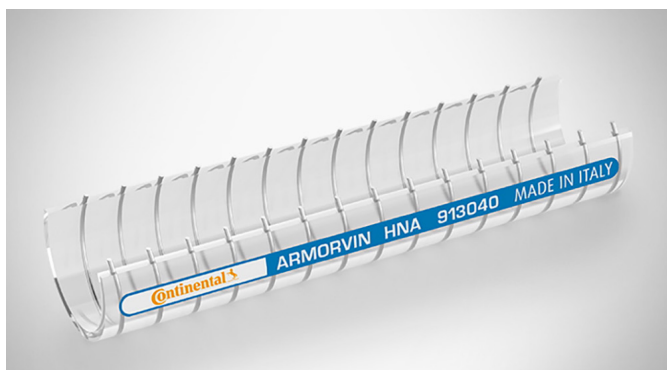

Πλαστικοποιημένος σωλήνας PVC με ενσωματωμένο σπирάλ από γαλβανισμένο χάλυβα, για αναρρόφηση και παροχή υγρών και υγρών τροφίμων.

Manufacturer's notices

The details given are purely indicative.

It is the responsibility of the user to establish if the product is suitable for his purpose.

At Continental, our aim is to ensure that the purchaser/user does so with the confidence that our production is constantly monitored and checked for compliance to the certifications obtained and as published in our current sales catalogues and our data sheets.

Σωλήνες Armorvin HNA
VACUPRESS ARMORVIN HNA
Manufacturer: Continental/Merlett

Technical data

NOMINAL Ø	INTERNAL Ø	EXTERNAL Ø	WEIGHT	BENDING RADIUS	WORKING PRESS.	BURSTING PRESS.	VACUUM	COIL LENGTH
mm	mm	mm	g/m	mm	bar	bar	m H ₂ O	m
10	10	16	155	20	7	21	8,5	60
12	12	18	180	25	7	21	8,5	60
14	14	20	200	30	6	18	8,5	60
16	16	22	225	35	6	18	8,5	60
18	18	24,5	280	40	6	18	8,5	60
19	19	26	310	45	5	15	8,5	60
20	20	27	340	50	5	15	8,5	60
22	22	29	360	55	5	15	8,5	60
25	25	33	510	60	5	15	8,5	60
30	30	39	600	70	4,5	13,5	8,5	60
32	32	41	650	75	4,5	13,5	8,5	60
35	35	44	730	80	4	12	8,5	60
38	38	47	800	90	4	12	8,5	30
40	40	49,5	870	95	3	9	8,5	30
45	45	55	1100	110	3	9	8	30
50	50	60	1200	125	3	9	8	30
55	55	66	1380	130	3	9	8	30
60	60	72	1800	140	2,5	7,5	8	30
63	63	75	1880	150	2,5	7,5	8	30
70	70	83	2200	170	2	6	8	30
75	75	89	2500	200	2	6	7	30
80	80	94	2700	220	2	6	7	30
90	90	104	2900	260	2	6	7	30
100	100	114	3250	300	2	6	7	30

Measurements and operating data are not legally binding and subject to change without notice.

Other specifications

	SMOOTH SURFACE	*****
	FLEXIBILITY	****
	ABRASION RESISTANCE	***
	TEMPERATURE RANGE	-5 °C + 65 °C
	CHEMICAL RESISTANCE	PVC CHART
	CRUSHING RESISTANCE	***
	O-PHTHALATE FREE	PHF*****
	SUITABLE FOR FOOD CONTACT APPLICATIONS ACCORDING TO EU/FDA REGULATIONS - SEE DECLARATION OF CONFORMITY	